



# BLRET 1300

BLRET1300024DC115X6940000W05

Article no.: 101824

**BILTON**

FOCUSED  
ON  
LINEAR  
LIGHT

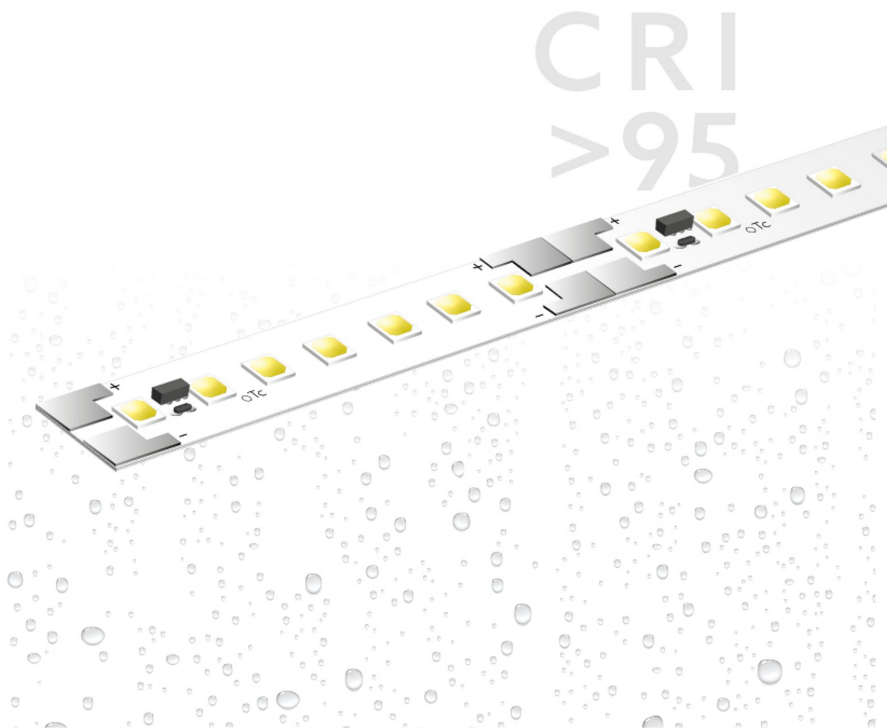

Lamp voltage



Luminous flux per meter



Max. length



Colour rendering index CRI

## TENDER TEXT

BILTONRETAIL 1300 LED strip 24VDC 11,5W/m IPX6 CRI>95 4000K WHITE 5m LED module BLRET 1300 Article 101824 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h. The BLRET 1300 LED-strip has a luminous flux of 1300 lm at 11.5 W, resulting in an efficiency of 113 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 7500.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 4000 K and a beam angle of 120°. All this with a colour rendering index of >95 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 7.14 mm. Degree of protection IPX6 Dimension (L x W x H): 5000.0 mm x 8.0 mm x 1.5 mm

## TOP-FEATURES

- //\_\_ Best light quality for shop lighting thanks to CRI >95
- //\_\_ Long line lengths and better stability due to double layer
- //\_\_ Wide choice of light colors and lumen packages
- //\_\_ Available in Degree of Protection IPX6
- //\_\_ UL certification available



# BLRET 1300

BLRET1300024DC115X6940000W05

Article no.: 101824

## MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	5000.0
Degree of protection (IP)	IPX6
Colour	White
Distance [mm]	7.14
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

## ELECTRICAL DATA

Overall efficiency [lm/W]	113
Lamp power per meter [W]	11.5
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

## LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	1300
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>95
Colour temperature [K]	4000
Energy efficiency class provided exchangeable built-in lamp	F

## CONNECTION

Number of poles	2
Conductor cross section [mm <sup>2</sup> ]	0.50
Max. length [mm]	7500.0

## TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	60000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

## PACKAGING INFORMATION

EAN	4250716935790
Article no.	101824

# BLRET 1300

**BILTON**FOCUSED  
ON  
LINEAR  
LIGHT**BLRET1300024DC115X6940000W05**

Article no.: 101824

Customs tariff number	94054099
Length [mm]	5000.0
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

\* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 °C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)