


# Corner connector CRI>80

**BLSMCCRNO19840NS**  
Article no.: 171129

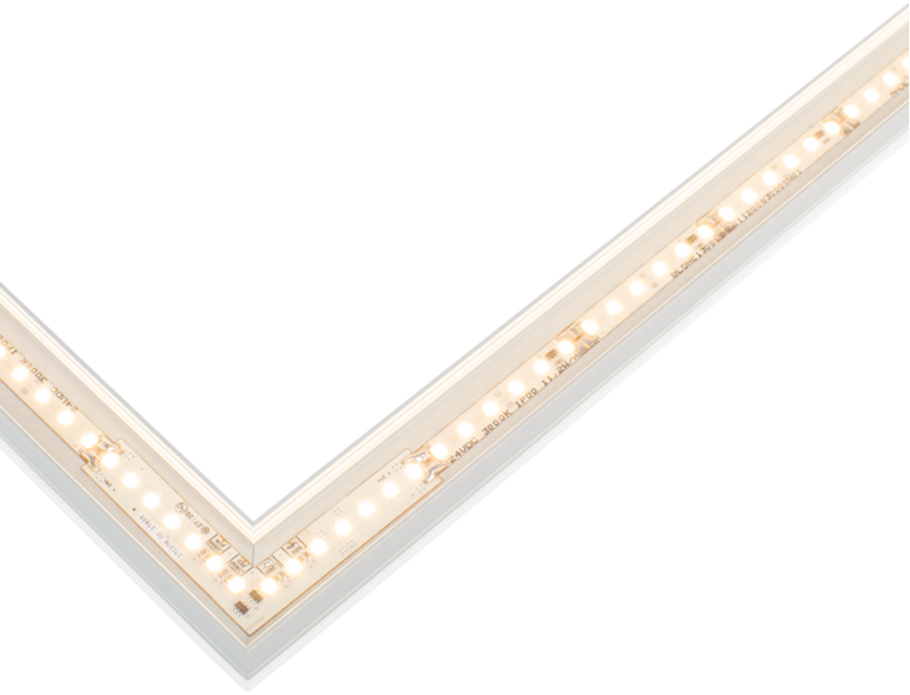

## TENDER TEXT

BL SmartCore Corner connector compatible with BLONE 2019 (900/1300/2000/3000lm/m), CRI80 4000K, without sensors 12mm width

## TOP-FEATURES

- //\_\_ Thanks to the corner feed, the light is not even interrupted at a 90 ° corner
- //\_\_ Compatible with BLO19 (BL ONE series - (900 / 1,300 / 2,000 / 3,000 lm/m)

24 V	>80	IP20	4000 K
------	-----	------	--------

# Corner connector CRI>80

**BLSMCCRNO19840NS**

Article no.: 171129

## MECHANICAL DATA

Net width [mm]	57.4
Net height [mm]	1.5
Net length [mm]	57.4
Degree of protection (IP)	IP20
Colour	White
Net weight [g]	1.8
Distance [mm]	7.14
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

## ELECTRICAL DATA

Lamp voltage [V]	24
Voltage type	DC
Protection class	III

## LIGHT TECHNICAL DATA

Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>80
Colour temperature [K]	4000

## CONNECTION

Number of poles	2
Conductor cross section [mm²]	0.50

## PACKAGING INFORMATION

EAN	4250716940619
Article no.	171129
Customs tariff number	94054099
Length [mm]	57.0
Gross weight [g]	1.8
State of origin	IT

**SAFETY INFORMATION:** Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

**DISCLAIMER OF WARRANTY:** The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)