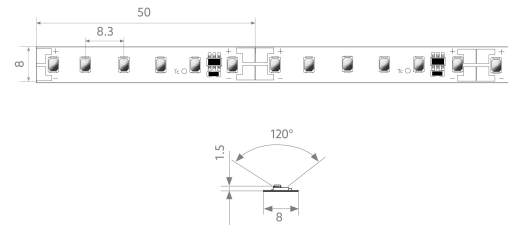


BLSOL3000024DC29020F40000W05

Article no.: 100005

24
V

Lamp voltage

3000
lm

Luminous flux per meter

4000.0
mm

Max. length

>98

Colour rendering index CRI

TENDER TEXT

BL SOL 3000 LED strip 24VDC 29W/m IP20 FS 4000K WHITE 5m LED module BL SOL Article 100005 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h . The BL SOL LED-strip has a luminous flux of 3000 lm at 29.0 W, resulting in an efficiency of 103 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 4000.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 4000 K and a beam angle of 120°. All this with a colour rendering index of >98 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 8.30 mm. Degree of protection IP20 Dimension (L x W x H): 5000.0 mm x 8.0 mm x 1.5 mm

TOP-FEATURES

//__ LED strips for light close to sunlight due to very high CRI

//__ For exceptional applications where natural light is needed.

24 V

>98

IP20

4000 K

RoHS
COMPLIANT
2002/95/EC

BLSOL3000024DC29020F40000W05

Article no.: 100005

MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	5000.0
Degree of protection (IP)	IP20
Colour	White
Net weight [g]	49
Distance [mm]	8.30
Distance relating to	LED to LED
Length of particular segments [mm]	50.0

ELECTRICAL DATA

Overall efficiency [lm/W]	103
Lamp power per meter [W]	29.0
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	III

LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	3000
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>98
Colour temperature [K]	4000
Energy efficiency class provided exchangeable built-in lamp	G

CONNECTION

Number of poles	2
Conductor cross section [mm²]	0.50
Max. length [mm]	4000.0

TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	60000
Ambient temperature during operating [°C]	- 20 ... + 45

PACKAGING INFORMATION

EAN	4250716941005
Article no.	100005
Customs tariff number	94054099

BLSOL3000024DC29020F40000W05

Article no.: 100005

Length [mm]	5000.0
Gross weight [g]	175.0
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 ° C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: www.biltongroup.com

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: www.biltongroup.com