


# BLONE 3000 >90

BLONE3000024DC350X6940000W20

Article no.: 100973

**BILTON**

FOCUSED  
ON  
LINEAR  
LIGHT

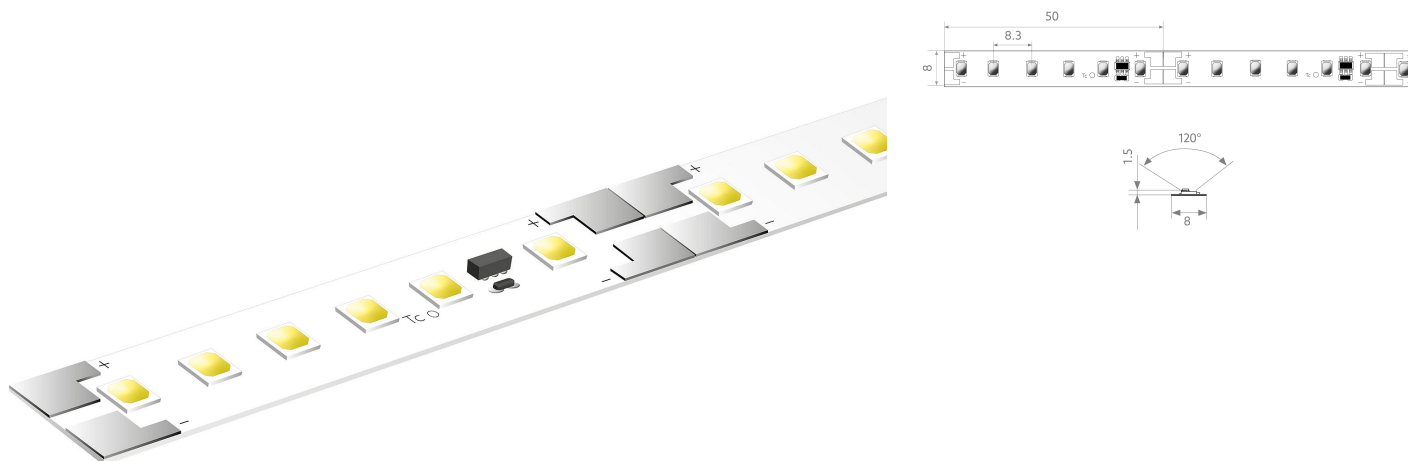

24  
V

Lamp voltage

3000  
lm

Luminous flux per meter

2500.0  
mm

Max. length

>90

Colour rendering index CRI

## TENDER TEXT

BILTONONE 3000 LED strip 24V DC 35,0W/m IPX6 CRI>90 4000K WHITE 20m LED module BLONE 3000 >90 Article 100973 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h . The BLONE 3000 >90 LED-strip has a luminous flux of 3000 lm at 35.0 W, resulting in an efficiency of 86 lm/W. At a nominal voltage of 24 V DC on the connection, a maximum module length of 2500.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 4000 K and a beam angle of 120°. All this with a colour rendering index of >90 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 50.0 mm, resulting in a LED distance of 8.30 mm. Degree of protection IPX6 Dimension (L x W x H): 20000.0 mm x 8.0 mm x 1.5 mm

## TOP-FEATURES

//\_\_ Wide range of applications for linear lighting in white

//\_\_ Highly flexible LED light strip for general lighting tasks

//\_\_ With a maximum module length of up to long, linear lighting lines can be implemented

24 V

>90

IPX6

4000 K



RoHS  
COMPLIANT  
2002/95/EC



# BLONE 3000 >90

**BLONE3000024DC350X6940000W20**

Article no.: 100973

**BILTON**

FOCUSED  
ON  
LINEAR  
LIGHT

## MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	1.5
Net length [mm]	20000.0
Degree of protection (IP)	IPX6
Colour	White
Net weight [g]	204.8
Distance [mm]	8.30
Length of particular segments [mm]	50.0

## ELECTRICAL DATA

Overall efficiency [lm/W]	86
Lamp power per meter [W]	35.0
Lamp voltage [V]	24
Input voltage range [V]	23 - 25
Voltage type	DC
Protection class	None

## LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	3000
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>90
Colour temperature [K]	4000
Energy efficiency class provided exchangeable built-in lamp	A +

## CONNECTION

Number of poles	2
Conductor cross section [mm²]	0.50
Max. length [mm]	2500.0

## TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	60000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

## PACKAGING INFORMATION

Article no.	100973
Customs tariff number	94054099

# BLONE 3000 >90

**BLONE3000024DC350X6940000W20**

Article no.: 100973

Length [mm]	20000.0
Gross weight [g]	328.6
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

\* Specifications of the electrical and photometric parameters: All values are valid in the thermally steady state at 25 ° C ambient temperature under the standardized measuring environment of BILTON. Nominal lumen values differ for different light colors, these values can be found in the respective data sheets. All values can have tolerances of +/- 15 %.

## NECESSARY ACCESSORIES

Article	Article no.
<b>Feeder 2-pole 500mm</b>	<b>170152</b>
<b>BLPSI 240</b>	<b>170171</b>

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)