


# BLTWO 1300

BLTWO1300012DC12020827000W05

Article no.: 101736

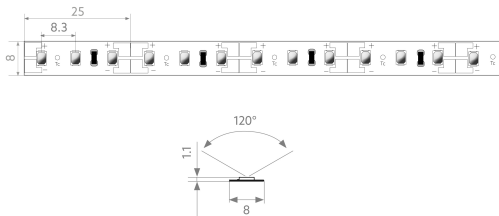

12  
V

Lamp voltage

1300  
lm

Luminous flux per meter

2000.0  
mm

Max. length

>80


Colour rendering index CRI

## TENDER TEXT

BL TWO 1300 LED strip 12V DC 12,0 W/m IP20 CRI>80 2700K WHITE 5m LED module BLTWO 1300 Article 101736 Linear LED light strip on a flexible circuit board. Installation using self-adhesive heat-conducting adhesive tape. Dimmable using BILTON LEDON Technology LED dimmer. Suitable for ambient temperatures from -20 ... +45 °C at a service life of 60000 h . The BLTWO 1300 LED-strip has a luminous flux of 1300 lm at 12.0 W, resulting in an efficiency of lm/W. At a nominal voltage of 12 V DC on the connection, a maximum module length of 2000.0 mm can be achieved. In terms of lighting, the module has a colour temperature of 2700 K and a beam angle of 120°. All this with a colour rendering index of >80 and a Binning selection based on SDCM3 (MacAdams). The light strip can be separated every 25.0 mm, resulting in a LED distance of 8.30 mm. Degree of protection IP20 Dimension (L x W x H): 5000.0 mm x 8.0 mm x 1.1 mm

## TOP-FEATURES

- //\_\_ High separability of 25.0 mm reduces cold spots
- //\_\_ Particularly suitable for furniture due to 12 V DC voltage
- //\_\_ Flexible installation, with perfect corner lighting
- //\_\_ Also available in higher protection class IP20



# BLTWO 1300

**BLTWO1300012DC12020827000W05**

Article no.: 101736

**BILTON**

FOCUSED  
ON  
LINEAR  
LIGHT

## MECHANICAL DATA

Net width [mm]	8.0
Net height [mm]	1.1
Net length [mm]	5000.0
Degree of protection (IP)	IP20
Colour	White
Net weight [g]	49
Distance [mm]	8.30
Distance relating to	LED to LED
Length of particular segments [mm]	25.0

## ELECTRICAL DATA

Lamp power per meter [W]	12.0
Lamp voltage [V]	12
Voltage type	DC
Protection class	III

## LIGHT TECHNICAL DATA

Luminous flux per meter [lm]	1300
Beam angle [°]	120
Colour consistency (McAdam ellipse)	SDCM3
Colour rendering index CRI	>80
Colour temperature [K]	2700
Energy efficiency class provided exchangeable built-in lamp	F

## CONNECTION

Number of poles	2
Max. length [mm]	2000.0

## TEMPERATURE TECHNICAL DATA

Rated life time L80/B10 at 25 °C [h]	60000
Ambient temperature during operating [°C]	- 20 ... + 45
Ambient/storage temperature [°C]	- 5 ... + 55
Operation temperature at Tc [°C]	- 5 ... + 60

## PACKAGING INFORMATION

EAN	4250716929218
Article no.	101736
Customs tariff number	94054099
Length [mm]	5000.0

# BLTWO 1300

**BLTWO1300012DC12020827000W05**

Article no.: 101736

Gross weight [g]	175.0
Gross height [mm]	18.0
Gross width [mm]	200.0
Gross length [mm]	200.0
State of origin	AT

\* Information about the electrical and lighting technology measurements: Performance data measured after 1 min. at 25 °C ambient temperature and a light colour of 4,000 K (or RGB). These values can have a tolerance value of -/+ 15%. Module length at 24 V input voltage at the module and luminous flux drop 10% over the specified length.

## NECESSARY ACCESSORIES

Article	Article no.
<b>DMX SXT</b>	<b>101649</b>

SAFETY INFORMATION: Read the safety and installation instructions carefully and completely before commissioning. The operating instructions can be found at: [www.biltongroup.com](http://www.biltongroup.com)

DISCLAIMER OF WARRANTY: The technical information corresponds to the status at the time of printing and have been worked out to the best of our knowledge. However, errors and printing errors are reserved. Make sure that you always use the latest version of the data sheets. The latest data sheet can be found at: [www.biltongroup.com](http://www.biltongroup.com)